



GUÍA RÁPIDA

Cables Opticos Activos Siemon
SFP28 25G / QSFP28 100G

Active Optical Cables


QSFP28 100G



Siemon 100G QSFP28 Active Optical Cable (AOC) assemblies offer a highly reliable and cost-effective alternative to transceiver assemblies available in lengths ranging from 0.5M to 100M, beyond the range of Direct Attach Copper Cables (DAC). These high performance and low power consumption AOCs are Ethernet, InfiniBand and MSA compliant with a robust construction, including a high-strength pull tab latching system which reduces plug loss and ensure more secure installations.

These 100G QSFP28 assemblies are capable of transmitting data up to 100Gb/s, offering an easy installation with a flexible, multimode fiber cable. AOCs eliminate the interoperability issues of transceiver assemblies to achieve proper parameter optimization and are equipped with Digital Diagnostic Monitoring, allowing I2C real-time supervision of operating parameters and transmits warnings if those parameters exceed specification.


Typical AOC applications include point-to-point connections within data centers, high performance computing and storage racks. The versatile connections can be rack-to-rack within the same row or another row, and their hot swappable and high-density design allows bi-directional use within a wide range of top-of-rack and other data center architectures.

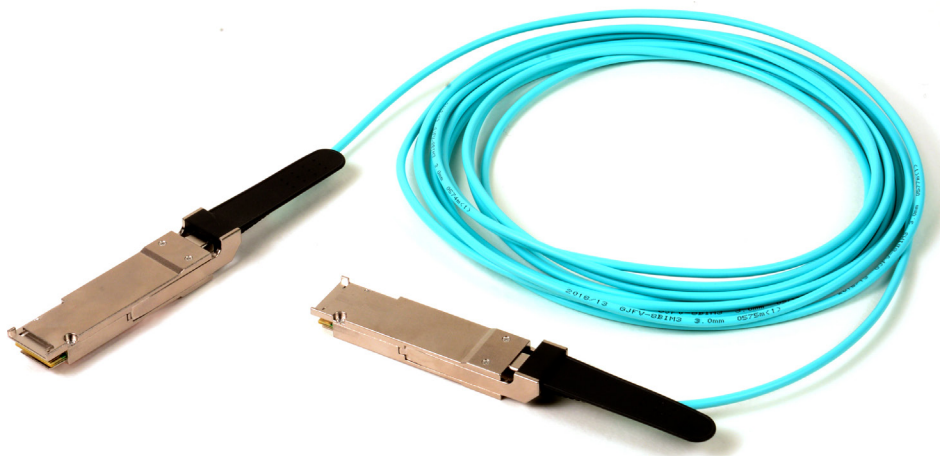

STANDARDS COMPLIANCE

- QSFP28 MSA
- IEEE P802.3bm
- 100GBASE-SR4
- RoHS
- CML Compatible Electrical I/O

PART NUMBER (PVC)	PART NUMBER (LSOH)	LENGTH
Q1Q28F-Y00.5M13	Q1Q28F-V00.5M13	0.5m (1.64 ft.)
Q1Q28F-Y01.0M13	Q1Q28F-V01.0M13	1.0m (3.28 ft.)
Q1Q28F-Y01.5M13	Q1Q28F-V01.5M13	1.5m (4.92 ft.)
Q1Q28F-Y02.0M13	Q1Q28F-V02.0M13	2.0m (6.56 ft.)
Q1Q28F-Y03.0M13	Q1Q28F-V03.0M13	3.0m (9.87 ft.)
Q1Q28F-Y05.0M13	Q1Q28F-V05.0M13	5.0m (16.40 ft.)
Q1Q28F-Y07.0M13	Q1Q28F-V07.0M13	7.0m (22.97 ft.)
Q1Q28F-Y10.0M13	Q1Q28F-V10.0M13	10m (32.80 ft.)
Q1Q28F-Y15.0M13	Q1Q28F-V15.0M13	15m (49.21 ft.)
Q1Q28F-Y20.0M13	Q1Q28F-V20.0M13	20m (65.62 ft.)
Q1Q28F-Y25.0M13	Q1Q28F-V25.0M13	25m (82.02 ft.)
Q1Q28F-Y30.0M13	Q1Q28F-V30.0M13	30m (98.43 ft.)
Q1Q28F-Y40.0M13	Q1Q28F-V40.0M13	40m (131.23 ft.)
Q1Q28F-Y50.0M13	Q1Q28F-V50.0M13	50m (164.04 ft.)
Q1Q28F-X0100M13	Q1Q28F-T0100M13	100m (328.08 ft.)

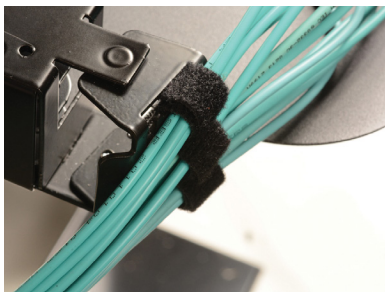

Small Diameter Bundles
AOC's thin diameter allow for smaller bundles which promotes better airflow.

Product Information



ABSOLUTE MAXIMUM RATINGS	MIN	MAX
Module Supply Voltage	0.5V	3.6V
Storage Temperature	-40°C (-40°F)	85°C (185°F)
Relative Humidity - Storage	0%	95%
Relative Humidity - Operating	0%	85%

MECHANICAL SPECIFICATIONS	
Minimum Bend Radius	30mm
Cable Diameter	3.0mm ± 0.15
Fiber Type	OM3 multimode <70m OM4 multimode ≥70m


ELECTRICAL SPECIFICATIONS	
Module Supply Voltage	3.14V to 3.46V (3.3V typical)
Case Operating Temperature	0°C (32°F) to 70° C (158°F) (25°C (77°F) typical)
Single Module Supply Current	540mA (typical)
Maximum Power Consumption Per End	1.78W
Bit Rate Per Channel	25.78 Gb/s

TRANSMITTER ELECTRICAL INTERFACE	
Tx Data Differential Input Voltage	200mV to 900mV
Tx Data Differential Input Impedance	100Ω (typical)

RECEIVER ELECTRICAL INTERFACE	
Rx Data Differential Output Voltage	440mV (typical)
Rx Data Differential Output Impedance	90Ω to 110Ω (100Ω typical)

CHANNEL PARAMETERS	
Channels	4 Lanes, bi-directional
Data Rate	25.78 Gbp/s channel max
Operating Wavelength	850nm

OVERALL DIMENSIONS

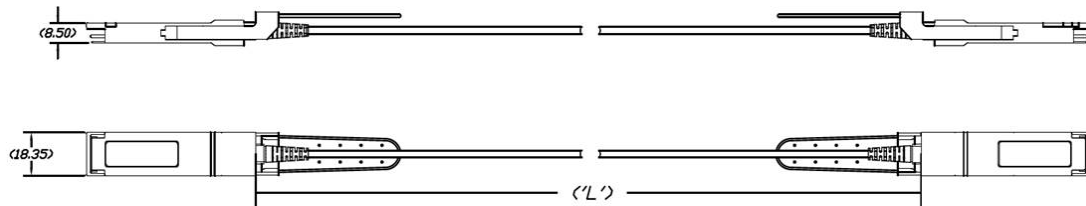

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200
 Asia Pacific P: (61) 2 8977 7500
 Latin America P: (571) 657 1950/51/52
 Europe P: (44) 0 1932 571771
 China P: (86) 215385 0303
 India Middle East P: (971) 4 3689743

Siemon Interconnect Solutions
 P: (1) 860 945 4213

SS_QSFP28 100G Rev. E 09/19 PRELIMINARY VERSIONS

Active Optical Cables


SFP28 25G



Siemon 25G SFP28 Active Optical Cable (AOC) assemblies offer a highly reliable and cost-effective alternative to transceiver assemblies available in lengths ranging from 0.5M to 100M, beyond the range of Direct Attach Copper Cables (DAC). These high performance and low power consumption AOCs are Ethernet, InfiniBand and MSA compliant with a robust construction, including a high-strength pull tab latching system which reduces plug loss and ensures more secure installations.

These 25G SFP28 assemblies are capable of transmitting data up to 25Gb/s, offering an easy installation with a flexible, multimode fiber cable. AOCs eliminate the interoperability issues of transceiver assemblies to achieve proper parameter optimization and are equipped with Digital Diagnostic Monitoring, allowing I2C real-time supervision of operating parameters and transmits warnings if those parameters exceed specification.


Typical AOC applications include point-to-point connections within data centers, high performance computing and storage racks. The versatile connections can be rack-to-rack within the same row or another row, and their hot swappable and high-density design allows use within a wide range of top-of-rack and other data center architectures.

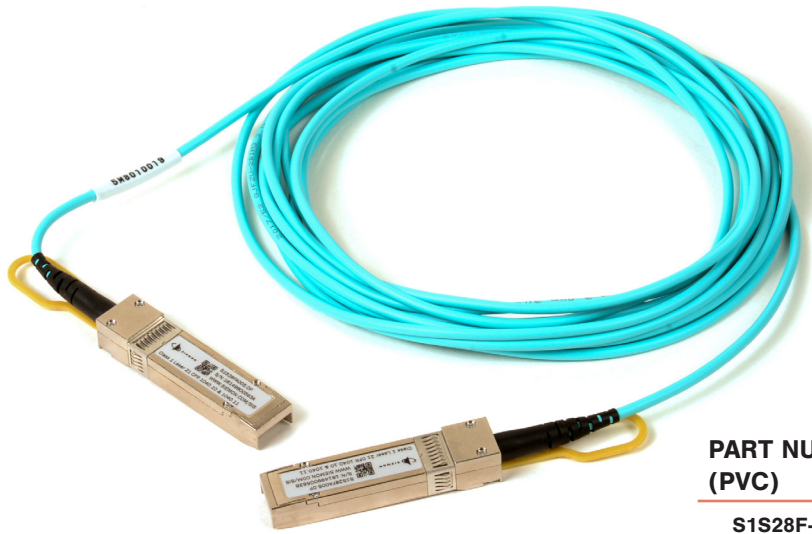

STANDARDS COMPLIANCE

- SFP+ MSA
- SFF8431 Electrical
- SFF8432 Mechanical
- RoHS
- TUV
- UL

PART NUMBER (PVC)	PART NUMBER (LSOH)	LENGTH
S1S28F-Y00.5M13	S1S28F-V00.5M13	0.5m (1.64 ft.)
S1S28F-Y01.0M13	S1S28F-V01.0M13	1.0m (3.28 ft.)
S1S28F-Y01.5M13	S1S28F-V01.5M13	1.5m (4.92 ft.)
S1S28F-Y02.0M13	S1S28F-V02.0M13	2.0m (6.56 ft.)
S1S28F-Y03.0M13	S1S28F-V03.0M13	3.0m (9.87 ft.)
S1S28F-Y05.0M13	S1S28F-V05.0M13	5.0m (16.40 ft.)
S1S28F-Y07.0M13	S1S28F-V07.0M13	7.0m (22.97 ft.)
S1S28F-Y10.0M13	S1S28F-V10.0M13	10m (32.80 ft.)
S1S28F-Y15.0M13	S1S28F-V15.0M13	15m (49.21 ft.)
S1S28F-Y20.0M13	S1S28F-V20.0M13	20m (65.62 ft.)
S1S28F-Y25.0M13	S1S28F-V25.0M13	25m (82.02 ft.)
S1S28F-Y30.0M13	S1S28F-V30.0M13	30m (98.43 ft.)
S1S28F-Y40.0M13	S1S28F-V40.0M13	40m (131.23 ft.)
S1S28F-Y50.0M13	S1S28F-V50.0M13	50m (164.04 ft.)
S1S28F-X0100M13	S1S28F-T0100M13	100m (328.08 ft.)

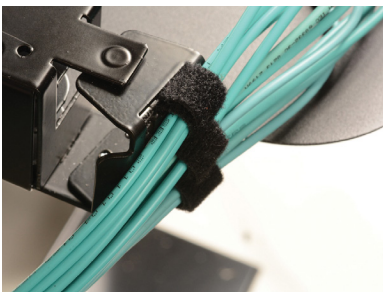

Small Diameter Bundles

AOC's thin diameter allow for smaller bundles which promotes better airflow.

Product Information



ABSOLUTE MAXIMUM RATINGS	MIN	MAX
Module Supply Voltage	0.5V	3.6V
Storage Temperature	-40°C (-40°F)	85°C (185°F)
Relative Humidity - Storage	0%	85%
Relative Humidity - Operating	0%	85%

MECHANICAL SPECIFICATIONS	
Minimum Bend Radius	30mm
Cable Diameter	3.0mm ±0.15
Fiber Type	OM3 multimode <70m OM4 multimode ≥70m


ELECTRICAL SPECIFICATIONS	
Module Supply Voltage	3.14V to 3.46V (3.3V typical)
Case Operating Temperature	0°C (32°F) to 70°C (158°F) 25°C (77°F) (typical)
Single Module Supply Current	300mA max.
Maximum Power Consumption Per End	1.04W
Bit Rate Per Channel	25.78Gb/s

TRANSMITTER ELECTRICAL INTERFACE	
Tx Data Differential Input Voltage	190mV to 700mV
Tx Data Differential Input Impedance	90Ω to 110Ω (100Ω typical)
Transmitter Disable Voltage	2V to $V_{CC1}+0.3V$
Transmitter Enable Voltage	0.3V to 0.8V

RECEIVER ELECTRICAL INTERFACE	
Rx Data Differential Output Voltage	300mV to 850mV
Rx Data Differential Output Impedance	90Ω to 110Ω (100Ω typical)
LOS Assert Voltage	2V to $V_{CC1}+0.3V$
LOS De-assert Voltage	0.3V to 0.4V

CHANNEL PARAMETERS	
Channels	1 Lane, bi-directional
Data Rate	25.78 Gbp/s channel max
Operating Wavelength	850nm

OVERALL DIMENSIONS

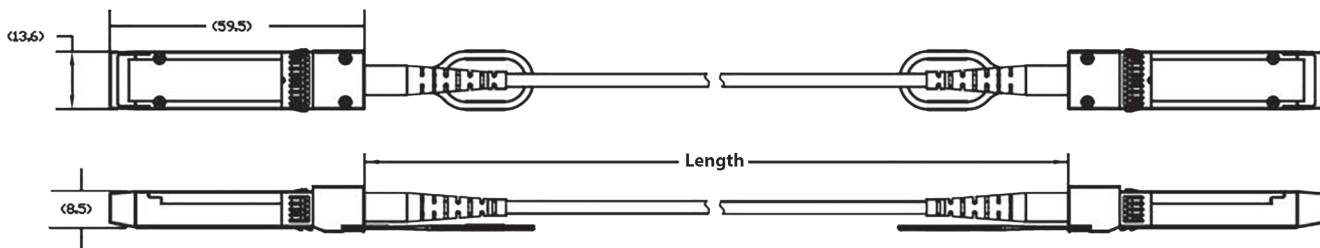

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India Middle East P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon Interconnect Solutions
P: (1) 860 945 4213

SS_SFP28 25G_Rev D_09/2019 PRELIMINARY VERSION3



¡COTIZA AHORA!



MONTERREY

Oscar Wilde No 143 Col. San Jerónimo
Monterrey, Nuevo León
México CP 64630
(81) 8123 9359

contacto@dielsa.com



CDMX

Benito Juárez No 19 Col. Lázaro Cárdenas
Naucalpan de Juárez, Edo. de México
México CP 53560
(55) 5353 3474